

Technical datasheet

AirLoc 710

 Art. no.
3.07100.70


Economical isolation pad with high damping. Low structure height. Suitable for production systems, general machine engineering.

 Ideal load p
10.0 daN/cm²

Article information	
Type	710
Name	AirLoc 710
Art. no.	3.07100.70
Color	yellow green
Technical Data	
Profile	without
Hardness [° Shore A]	70 - 75
Load p from [daN/cm ²]	5.0
Load p to [daN/cm ²]	20.0
Ideal load p [daN/cm ²]	10.0
Vertical natural frequency at ideal load f _{0v} [Hz]	82.0
Horizontal natural frequency at ideal load f _{0h} [Hz]	16.0
Tolerance natural frequency +/- [Hz]	10%
Vertical damping ratio D at ideal load [%]	21.0
Tolerance +/-	10%
Coefficient of friction on concrete with fine mortar	0.8
Coefficient of friction tolerance +/-	0.1
Weight [kg]	7.0
Dimensions	
Length L [mm]	1000
Width B [mm]	500
Pad thickness unloaded [mm]	10
Pad thickness tolerance web	DIN 7715/T5/P3
Range of application	
Temperature range from [°C]	-15
Temperature range to [°C]	100




Diagram vertical natural frequency

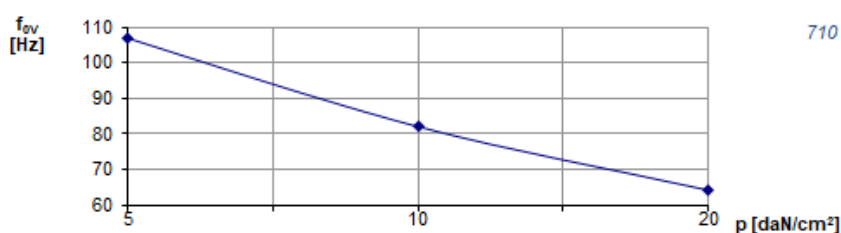

Tolerance natural frequency vertical f_{0v} [Hz] 10%
 +/-

Diagram deflection

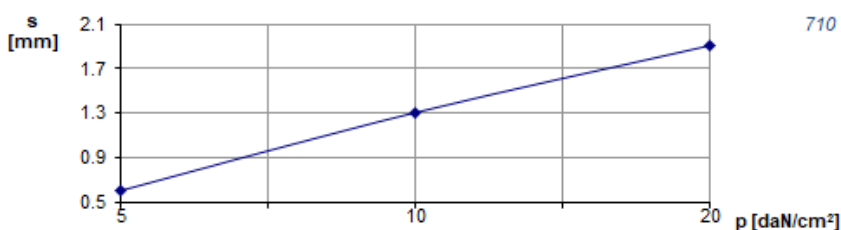

Tolerance Deflection s +/- 10%

Standard pad dimensions

Article no.	Length [mm]	Width [mm]
3.07100.70	1000	500
3.07100.71	500	500

3.07100.72	500	250
3.07100.76	250	250
3.07100.80	200	200
3.07100.85	125	125
3.07100.86	100	100
Other dimensions in all shapes available from stock upon request.		