

Technical datasheet

Flat Jacmounts GLP 225 /B1

Art. no.
1.12225.50


Max. load
1500 daN

For machine placement at low stability ground. Provide a wide load distribution. Best vibration isolation despite low installation height.


Article information	
Type	GLP 225 /B1
Name	Flat Jacmounts
Art. no.	1.12225.50
Color	RAL 7001 silver grey
Other colors upon request.	
Surface treatment	painted




Technical Data		Dimensions	
Max. load [daN]	1500	Height H [mm]	29
Weight [kg]	6.1	Length L [mm]	238
Temperature range from [°C]	-20	Width B [mm]	238
Temperature range to [°C]	80	Pad equipment	
		Bottom pad type	B1
		Pad thickness unloaded [mm]	13
		Coefficient of friction on concrete with fine mortar	0.9
		Hardness [° Shore A]	40 - 45
		Bottom pad area A_1 [cm ²]	506

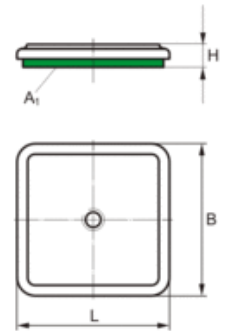

Suitable studs, special studs, leveling screws, leveling sockets

	Studs P	M20	more
---	---------	-----	----------------------

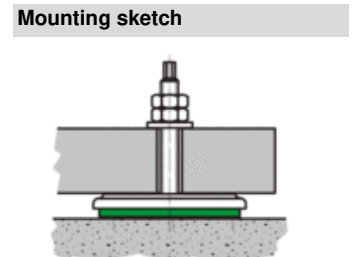

Useful remarks
Levelling only possible with shimming plates between machine foot and GLP Jacmount ®.

Remark extent of supply
Studs need to be ordered separately.