

## Technical datasheet

### Flat Jacmounts GLP-S 300 /910/902

Art. no.  
**1.12309.75**

Provide a wide load distribution, for high static load placement of machines at low stability ground. Excellent leveling stability and high overall stability at low installation height. Free standing, no fixation required.


Max. load  
**14000 daN**

Article information	
Type	GLP-S 300 /910/902
Name	Flat Jacmounts
Art. no.	1.12309.75
Color	RAL 7001 silver grey
Other colors upon request.	
Surface treatment	painted

#### Type illustration



#### Dimensioned sketch

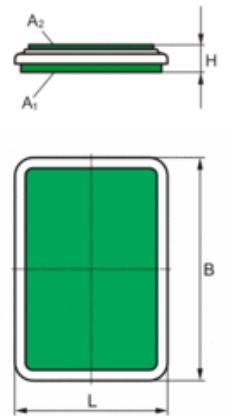

Technical Data	
Max. load [daN]	14000
Weight [kg]	13.492
Temperature range from [°C]	-20
Temperature range to [°C]	80

Dimensions	
Height H [mm]	36
Length L [mm]	320
Width B [mm]	250

Pad equipment	
Bottom pad type	910
Pad thickness unloaded [mm]	10
Coefficient of friction on concrete with fine mortar	0.8
Coefficient of friction tolerance +/-	0.1
Hardness [° Shore A]	90 - 95
Bottom pad area $A_1$ [cm <sup>2</sup> ]	680
Top pad type	902
Pad thickness unloaded [mm]	2
Coefficient of friction on concrete with fine mortar	0.8
Hardness [° Shore A]	90 - 95
Top pad area $A_2$ [cm <sup>2</sup> ]	744

#### Mounting sketch

