

Technical datasheet

Jacmounts pat.
PRG 85 /405

Art. no.
1.16085.43

Extremely stable. Best suited for light machines and systems for which there is permanently defined ground contact.


Max. load
450 daN

Article information	
Type	PRG 85 /405
Name	Jacmounts pat.
Art. no.	1.16085.43
Color	RAL 7001 silver grey
Other colors upon request.	
Surface treatment	painted


Type illustration



Dimensioned sketch

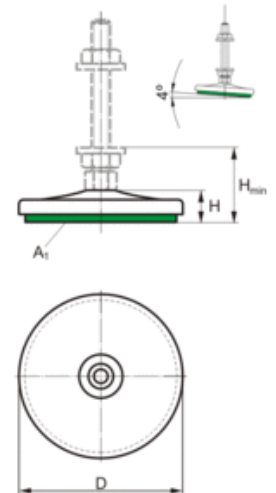

Mounting sketch



Technical Data		Dimensions	
Max. load [daN]	450	Height H [mm]	19.5
Weight [kg]	0.334	Height H _{min} [mm] M10	44
Temperature range from [°C]	-20	Height H _{min} [mm] M12	44.5
Temperature range to [°C]	80	Height H _{min} [mm] M16	52
Pad equipment		Diameter D [mm]	85
Bottom pad type	405		
Pad thickness unloaded [mm]	5		
Coefficient of friction on concrete with fine mortar	0.9		
Hardness [° Shore A]	40 - 45		
Bottom pad area A ₁ [cm ²]	44		

Suitable studs, special studs, leveling screws, leveling sockets



Special studs G1

M10, M12, M16

[more](#)

Useful remarks

The body of the element and the special levelling stud are, once installed, connected with each other, forming one single unit. The special levelling stud is exchangeable at any time by means of a patented connection.

Remark extent of supply

Special studs need to be ordered separately.