

# Technical datasheet

Jacmounts pat.  
**PRG 230 /705**

Art. no.  
**1.16230.58**

Application secure thanks to high level of damping. Very good stability due to high ground adhesion.

Max. load  
**6000 daN**


Article information	
Type	PRG 230 /705
Name	Jacmounts pat.
Art. no.	1.16230.58
Color	RAL 7001 silver grey
Other colors upon request.	
Surface treatment	painted

## Type illustration




Technical Data		Dimensions	
Max. load [daN]	6000	Height H [mm]	27
Weight [kg]	4.2	Height H <sub>min</sub> [mm] M16	53
Temperature range from [°C]	-15	Height H <sub>min</sub> [mm] M20	63.5
Temperature range to [°C]	100	Height H <sub>min</sub> [mm] M24	74.5
		Diameter D [mm]	230

## Dimensioned sketch

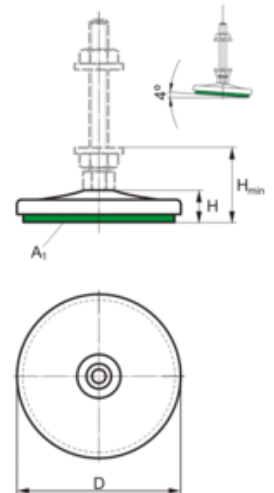

Pad equipment	
Bottom pad type	705
Pad thickness unloaded [mm]	5
Coefficient of friction on concrete with fine mortar	0.8
Hardness [° Shore A]	70 - 75
Bottom pad area A <sub>1</sub> [cm <sup>2</sup> ]	380

## Mounting sketch



## Suitable studs, special studs, leveling screws, leveling sockets



Special studs G2

M16, M20, M24

[more](#)

## Useful remarks

The body of the element and the special levelling stud are, once installed, connected with each other, forming one single unit. The special levelling stud is exchangeable at any time by means of a patented connection.

## Remark extent of supply

Special studs need to be ordered separately.