

## Technical datasheet

Jacmounts M16x1.5  
**PRP 120 /425**

Art. no.  
**1.15120.48**

For nibbling machines and compressors. Best isolation effect, high stability and good damping.


Max. load  
**600 daN**

Article information	
Type	PRP 120 /425
Name	Jacmounts M16x1.5
Art. no.	1.15120.48
Color	RAL 1018 zinc yellow
Other colors upon request.	
Surface treatment	painted

### Type illustration




### Dimensioned sketch

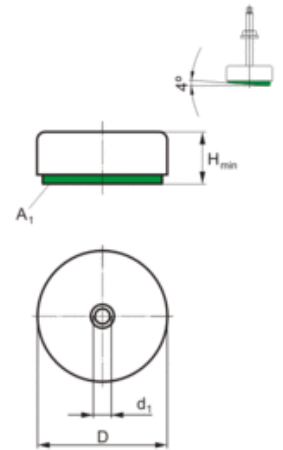



Technical Data		Dimensions	
Max. load [daN]	600	Height $H_{min}$ [mm]	50
Leveling range [mm]	25	Diameter D [mm]	123
Weight [kg]	1.65	inner thread $d_1$	M16x1.5
Temperature range from [°C]	-20	Pad equipment	
Temperature range to [°C]	80	Bottom pad type	425
		Pad thickness unloaded [mm]	25
		Coefficient of friction on concrete with fine mortar	0.9
		Hardness [° Shore A]	40 - 45
		Bottom pad area $A_1$ [cm <sup>2</sup> ]	74

### Mounting sketch



### Suitable studs, special studs, leveling screws, leveling sockets

	Levelling studs R1	M16x1.5	<a href="#">more</a>
	Levelling studs R2	M16x1.5	<a href="#">more</a>

### Remark extent of supply

Levelling studs need to be ordered separately.