

Technical datasheet

Jacmounts M16x1.5
PRP 120 /925

Art. no.
1.15120.64

For injection moulding machines, machines with high dynamic horizontal force, Extremely high degree of horizontal stability.


Max. load
2000 daN

| Article information | |
|----------------------------|----------------------|
| Type | PRP 120 /925 |
| Name | Jacmounts M16x1.5 |
| Art. no. | 1.15120.64 |
| Color | RAL 1018 zinc yellow |
| Other colors upon request. | |
| Surface treatment | Painted |

Type illustration



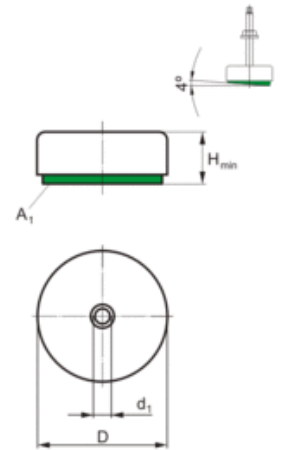

Dimensioned sketch




| Technical Data | | Dimensions | |
|-----------------------------|------|--|---------|
| Max. load [daN] | 2000 | Height H_{min} [mm] | 50 |
| Leveling range [mm] | 25 | Diameter D [mm] | 123 |
| Weight [kg] | 1.65 | inner thread d_1 | M16x1.5 |
| Temperature range from [°C] | -20 | Pad equipment | |
| Temperature range to [°C] | 80 | Bottom pad type | 925 |
| | | Pad thickness unloaded [mm] | 25 |
| | | Coefficient of friction on concrete with fine mortar | 0.8 |
| | | Hardness [° Shore A] | 90 - 95 |
| | | Bottom pad area A_1 [cm ²] | 74 |

Suitable studs, special studs, leveling screws, leveling sockets

| | | | |
|---|--------------------|---------|----------------------|
|  | Levelling studs R1 | M16x1.5 | more |
|  | Levelling studs R2 | M16x1.5 | more |

Mounting sketch



Remark extent of supply

Levelling studs need to be ordered separately.