

## Technical datasheet

Jacmounts M20x1.5  
**PRP 160 /425**

Art. no.  
**1.15160.48**


For nibbling machines and compressors. Best isolation effect, high stability and good damping.

Max. load  
**1200 daN**

Article information	
Type	PRP 160 /425
Name	Jacmounts M20x1.5
Art. no.	1.15160.48
Color	RAL 1018 zinc yellow
Other colors upon request.	
Surface treatment	painted




Technical Data		Dimensions	
Max. load [daN]	1200	Height $H_{min}$ [mm]	52
Leveling range [mm]	25	Diameter D [mm]	168
Weight [kg]	2.95	inner thread $d_1$	M20x1.5
Temperature range from [°C]	-20	Pad equipment	
Temperature range to [°C]	80	Bottom pad type	425
		Pad thickness unloaded [mm]	25
		Coefficient of friction on concrete with fine mortar	0.9
		Hardness [° Shore A]	40 - 45
		Bottom pad area $A_1$ [cm <sup>2</sup> ]	157

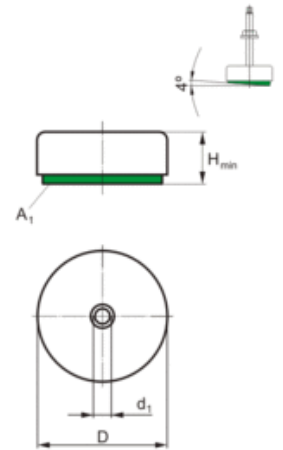

**Suitable studs, special studs, leveling screws, leveling sockets**

	Levelling studs R1	M20x1.5	<a href="#">more</a>
	Levelling studs R2	M20x1.5	<a href="#">more</a>

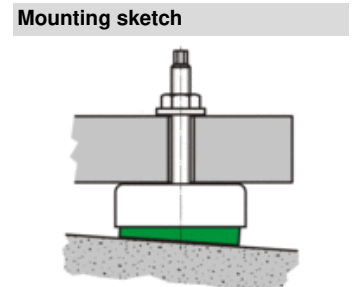

**Remark extent of supply**  
Levelling studs need to be ordered separately.