

Technical datasheet

Jacmounts M24x2
PRP 200 /425

Art. no.
1.15200.48


For nibbling machines and compressors. Best isolation effect, high stability and good damping.

Max. load
1750 daN

Article information	
Type	PRP 200 /425
Name	Jacmounts M24x2
Art. no.	1.15200.48
Color	RAL 1018 zinc yellow
Other colors upon request.	
Surface treatment	painted




Technical Data		Dimensions	
Max. load [daN]	1750	Height H_{min} [mm]	54
Leveling range [mm]	25	Diameter D [mm]	205
Weight [kg]	4.75	inner thread d_1	M24x2
Temperature range from [°C]	-20	Pad equipment	
Temperature range to [°C]	80	Bottom pad type	425
		Pad thickness unloaded [mm]	25
		Coefficient of friction on concrete with fine mortar	0.9
		Hardness [° Shore A]	40 - 45
		Bottom pad area A_1 [cm ²]	241

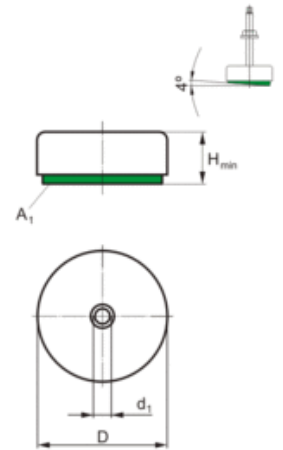

Suitable studs, special studs, leveling screws, leveling sockets

	Levelling studs R1	M24x2	more
	Levelling studs R2	M24x2	more

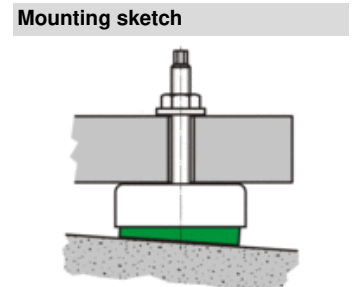

Remark extent of supply
Levelling studs need to be ordered separately.