

Technical datasheet

Jacmounts M24x2 PRP 200 /925

Art. no.
1.15200.64

For injection moulding machines, machines with high dynamic horizontal force, Extremely high degree of horizontal stability.


Max. load
4000 daN

Article information	
Type	PRP 200 /925
Name	Jacmounts M24x2
Art. no.	1.15200.64
Color	RAL 1018 zinc yellow
Other colors upon request.	
Surface treatment	painted

Article illustration



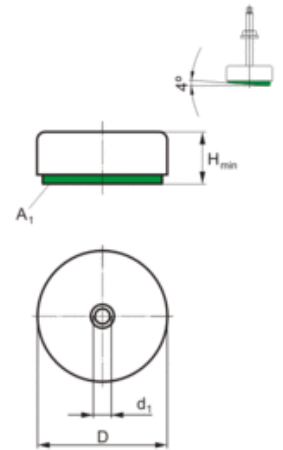

Dimensioned sketch




Technical Data		Dimensions	
Max. load [daN]	4000	Height H_{min} [mm]	54
Leveling range [mm]	25	Diameter D [mm]	205
Weight [kg]	4.8	inner thread d_1	M24x2
Temperature range from [°C]	-20	Pad equipment	
Temperature range to [°C]	80	Bottom pad type	925
		Pad thickness unloaded [mm]	25
		Coefficient of friction on concrete with fine mortar	0.8
		Hardness [° Shore A]	90 - 95
		Bottom pad area A_1 [cm ²]	241

Suitable studs, special studs, leveling screws, leveling sockets

	Levelling studs R1	M24x2	more
	Levelling studs R2	M24x2	more

Mounting sketch



Remark extent of supply

Levelling studs need to be ordered separately.