

Technical datasheet

Jacmounts M24x2 PRP 200 /725

Art. no.
1.15200.68

For injection moulding machines and machines with high dynamic vertical force. Fast and effective movement damping.


Max. load
4000 daN

Article information	
Type	PRP 200 /725
Name	Jacmounts M24x2
Art. no.	1.15200.68
Color	RAL 1018 zinc yellow
Other colors upon request.	
Surface treatment	painted

Article illustration




Dimensioned sketch

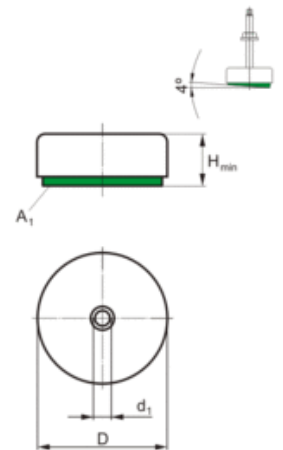

Technical Data		Dimensions	
Max. load [daN]	4000	Height H_{min} [mm]	54
Leveling range [mm]	25	Diameter D [mm]	205
Weight [kg]	4.7	inner thread d_1	M24x2
Temperature range from [°C]	-15	Pad equipment	
Temperature range to [°C]	100	Bottom pad type	725
		Pad thickness unloaded [mm]	25
		Coefficient of friction on concrete with fine mortar	0.8
		Hardness [° Shore A]	70 - 75
		Bottom pad area A_1 [cm ²]	241

Mounting sketch

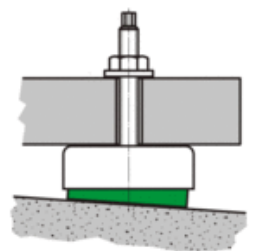

Suitable studs, special studs, leveling screws, leveling sockets			
	Levelling studs R1	M24x2	more
	Levelling studs R2	M24x2	more

Remark extent of supply
Levelling studs need to be ordered separately.