

Technical datasheet

Jacmounts M27x2 PRP 250-HD /425

Art. no.
1.15253.48

For nibbling machines and compressors. Best isolation effect, high stability and good damping.


Max. load
3000 daN

Article information	
Type	PRP 250-HD /425
Name	Jacmounts M27x2
Art. no.	1.15253.48
Color	RAL 1018 zinc yellow
Other colors upon request.	
Surface treatment	painted

Type illustration




Dimensioned sketch

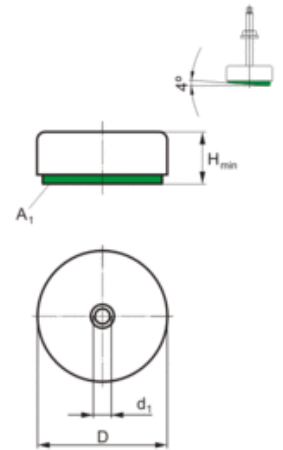



Technical Data		Dimensions	
Max. load [daN]	3000	Height H_{min} [mm]	60
Leveling range [mm]	25	Diameter D [mm]	260
Weight [kg]	11.184	inner thread d_1	M27x2
Temperature range from [°C]	-20	Pad equipment	
Temperature range to [°C]	80	Bottom pad type	425
		Pad thickness unloaded [mm]	25
		Coefficient of friction on concrete with fine mortar	0.9
		Hardness [° Shore A]	40 - 45
		Bottom pad area A_1 [cm ²]	408

Mounting sketch



Suitable studs, special studs, leveling screws, leveling sockets

	Levelling studs R1	M27x2	more
	Levelling studs R2	M27x2	more

Remark extent of supply

Levelling studs need to be ordered separately.