

## Technical datasheet

### Jacmounts M27x2 PRP 250-HD /925

Art. no.  
**1.15253.64**

For injection moulding machines, machines with high dynamic horizontal force, Extremely high degree of horizontal stability.


Max. load  
**8000 daN**

Article information	
Type	PRP 250-HD /925
Name	Jacmounts M27x2
Art. no.	1.15253.64
Color	RAL 1018 zinc yellow
Other colors upon request.	
Surface treatment	painted

#### Type illustration




#### Dimensioned sketch

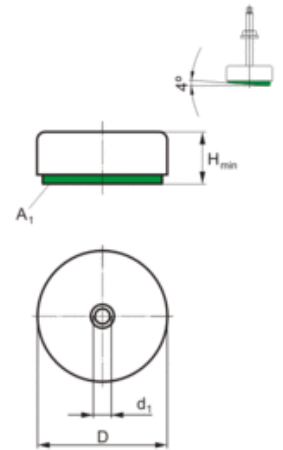


Technical Data		Dimensions	
Max. load [daN]	8000	Height $H_{min}$ [mm]	60
Leveling range [mm]	25	Diameter D [mm]	260
Weight [kg]	11.25	inner thread $d_1$	M27x2
Temperature range from [°C]	-20	Pad equipment	
Temperature range to [°C]	80	Bottom pad type	925
		Pad thickness unloaded [mm]	25
		Coefficient of friction on concrete with fine mortar	0.8
		Hardness [° Shore A]	90 - 95
		Bottom pad area $A_1$ [cm <sup>2</sup> ]	408

#### Mounting sketch



#### Suitable studs, special studs, leveling screws, leveling sockets

	Levelling studs R1	M27x2	<a href="#">more</a>
	Levelling studs R2	M27x2	<a href="#">more</a>

#### Remark extent of supply

Levelling studs need to be ordered separately.