

Technical datasheet

Jacmounts M27x2 PRP 250-HD /725

Art. no.
1.15253.68

For injection moulding machines and machines with high dynamic vertical force. Fast and effective movement damping.


Max. load
8000 daN

| Article information | |
|----------------------------|----------------------|
| Type | PRP 250-HD /725 |
| Name | Jacmounts M27x2 |
| Art. no. | 1.15253.68 |
| Color | RAL 1018 zinc yellow |
| Other colors upon request. | |
| Surface treatment | painted |

Type illustration




Dimensioned sketch

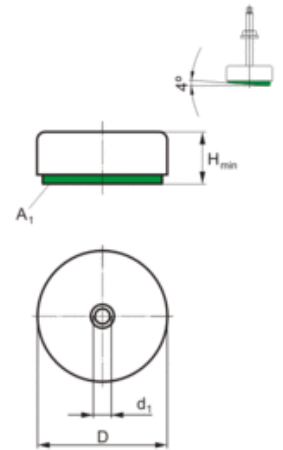

| Technical Data | | Dimensions | |
|-----------------------------|--------|--|---------|
| Max. load [daN] | 8000 | Height H_{min} [mm] | 60 |
| Leveling range [mm] | 25 | Diameter D [mm] | 260 |
| Weight [kg] | 11.182 | inner thread d_1 | M27x2 |
| Temperature range from [°C] | -15 | Pad equipment | |
| Temperature range to [°C] | 100 | Bottom pad type | 725 |
| | | Pad thickness unloaded [mm] | 25 |
| | | Coefficient of friction on concrete with fine mortar | 0.8 |
| | | Hardness [° Shore A] | 70 - 75 |
| | | Bottom pad area A_1 [cm ²] | 408 |

Mounting sketch



| Suitable studs, special studs, leveling screws, leveling sockets | | | |
|---|--------------------|-------|----------------------|
|  | Levelling studs R1 | M27x2 | more |
|  | Levelling studs R2 | M27x2 | more |

Remark extent of supply
Levelling studs need to be ordered separately.