

Technical datasheet

Jacmounts M30x2
PRP 300-HD /425

Art. no.
1.15302.48

For nibbling machines and compressors. Best isolation effect, high stability and good damping.


Max. load
4500 daN

Article information	
Type	PRP 300-HD /425
Name	Jacmounts M30x2
Art. no.	1.15302.48
Color	RAL 1018 zinc yellow
Other colors upon request.	
Surface treatment	painted

Type illustration




Dimensioned sketch

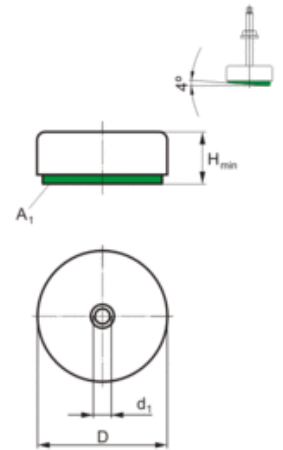

Technical Data		Dimensions	
Max. load [daN]	4500	Height H_{min} [mm]	73
Leveling range [mm]	25	Diameter D [mm]	305
Weight [kg]	17.439	inner thread d_1	M30x2
Temperature range from [°C]	-20	Pad equipment	
Temperature range to [°C]	80	Bottom pad type	425
		Pad thickness unloaded [mm]	25
		Coefficient of friction on concrete with fine mortar	0.9
		Hardness [° Shore A]	40 - 45
		Bottom pad area A_1 [cm ²]	638

Mounting sketch



Suitable studs, special studs, leveling screws, leveling sockets			
	Levelling studs R1	M30x2	more
	Levelling studs R2	M30x2	more

Remark extent of supply
Levelling studs need to be ordered separately.