

Technical datasheet

Jacmounts M24x2 PRS 240-24 /910

Art. no.
1.17240-24.75

For injection moulding machines, machines with high dynamic horizontal force, Extremely high degree of horizontal stability.


Max. load
7000 daN

Article information	
Type	PRS 240-24 /910
Name	Jacmounts M24x2
Art. no.	1.17240-24.75
Color	RAL 7001 silver grey
Other colors upon request.	
Surface treatment	painted

Type illustration



Dimensioned sketch

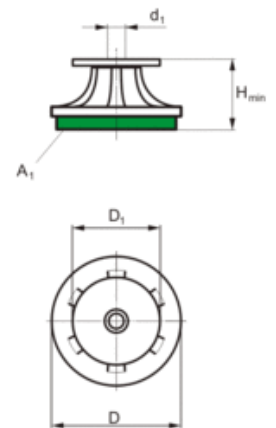

Technical Data		Dimensions	
Max. load [daN]	7000	Height H_{min} [mm]	80
Leveling range [mm]	30	Diameter D [mm]	239
Weight [kg]	9.377	Diameter D_1 [mm]	150
Temperature range from [°C]	-20	inner thread d_1	M24x2
Temperature range to [°C]	80		

Pad equipment

Bottom pad type	910
Pad thickness unloaded [mm]	10
Coefficient of friction on concrete with fine mortar	0.8
Hardness [° Shore A]	90 - 95
Bottom pad area A_1 [cm ²]	412

Suitable studs, special studs, leveling screws, leveling sockets

	Levelling studs PRS/PRSK	M24x2	more
---	--------------------------	-------	----------------------

Remark extent of supply

Levelling studs need to be ordered separately.

Mounting sketch

