Technical datasheet

Wedgmounts
4-VRC-72 /NF

Art. no.
1.30004-72.61

For passive placement of sensitive devices and machine placement in multi storied buildings.
Best vibration isolation.

Max. load
2000 daN

Article information	
Type	4-VRC-72 /NF
Name	Wedgmounts
Art. no.	1.30004-72.61
Color	RAL 7016 anthracite grey
Other colors upon request.	
Surface treatment	painted

Technical Data	
Max. load [daN]	2000
Leveling range [mm]	6
Leveling range [mm]	-6
Leveling distance per turn [mm]	0.2
Temperature range from [°C]	-20
Temperature range to [°C]	80
Weight [kg]	15.478

Pad equipment	
Bottom pad type	B1
Pad thickness unloaded [mm]	13
Coefficient of friction on concrete with fine mortar	0.9
Coefficient of friction tolerance +/-	0.1
Hardness [° Shore A]	40 - 45
Bottom pad area A_1 [cm2]	392
Top pad type	903
Pad thickness unloaded [mm]	3
Coefficient of friction on concrete with fine mortar	0.8
Hardness [° Shore A]	90 - 95
Top pad area A_2 [cm2]	392

Dimensions	
Height H [mm]	88
Height H_{oB} in neutral position, without pads [mm]	72
Length L [mm]	200
Length L_1 [mm]	60
Length L_2 [mm]	42
Length L_{max} [mm]	301
Width B [mm]	200
Width across flats SW_1 [mm]	22
Width across flats SW_2 [mm]	12

Type illustration

System description



Dimensioned sketch

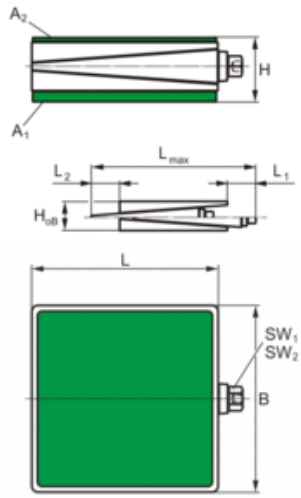

Mounting sketch