

Technical datasheet

Wedgmounts 407-VRC /NF

Art. no.
1.30407.61


For passive placement of sensitive devices and machine placement in multi storied buildings.
Best vibration isolation.

Max. load
2500 daN

Article information	
Type	407-VRC /NF
Name	Wedgmounts
Art. no.	1.30407.61
Color	RAL 7016 anthracite grey
Other colors upon request.	
Surface treatment	Painted



Technical Data		Dimensions	
Max. load [daN]	2500	Height H [mm]	81
Leveling range [mm]	11	Height H_{0B} in neutral position, without pads [mm]	65
Leveling range [mm]	-10	Length L [mm]	250
Leveling distance per turn [mm]	0.23	Length L_1 [mm]	83
Temperature range from [°C]	-20	Length L_2 [mm]	73
Temperature range to [°C]	80	Length L_{max} [mm]	414
Weight [kg]	16.65	Width B [mm]	200

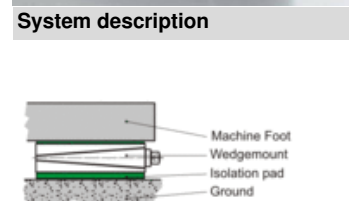

Pad equipment	
Bottom pad type	B1
Pad thickness unloaded [mm]	13
Coefficient of friction on concrete with fine mortar	0.9
Coefficient of friction tolerance +/-	0.1
Hardness [° Shore A]	40 - 45
Bottom pad area A_1 [cm ²]	500
Top pad type	903
Pad thickness unloaded [mm]	3
Coefficient of friction on concrete with fine mortar	0.8
Hardness [° Shore A]	90 - 95
Top pad area A_2 [cm ²]	500

Width across flats SW_1 [mm]	27
Width across flats SW_2 [mm]	14

