

Technical datasheet

Insert Wedgmounds QFixx 515.6-VRKCS /902


Art. no.
1.53515-6.59

For closed machine foot design. A simple blind thread in the machine foot is necessary to create a strong and secure connection.


Max. load
15000 daN

Article information	
Type	515.6-VRKCS /902
Name	Insert Wedgmounds QFixx
Art. no.	1.53515-6.59
Color	RAL 9005 jet black

Article illustration

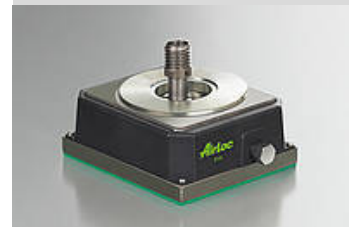


System description

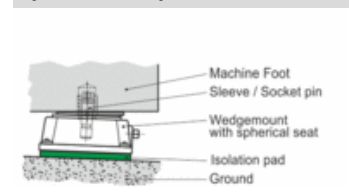



Technical Data		Dimensions	
Max. load [daN]	15000	Height H [mm]	71
Inclination [°]	3	Height H _{0B} in neutral position, without pads [mm]	69
Leveling range [mm]	5	Length L [mm]	160
Leveling range [mm]	-5	x [mm]	80
Leveling distance per turn [mm]	0.37	y [mm]	70
Temperature range from [°C]	-20	Width B [mm]	140
Temperature range to [°C]	80	Diameter D ₁ [mm]	113
Weight [kg]	6.711	Width across flats SW ₁ [mm]	17

Pad equipment	
Bottom pad type	902
Pad thickness unloaded [mm]	2
Coefficient of friction on concrete with fine mortar	0.8
Hardness [° Shore A]	90 - 95
Bottom pad area A ₁ [cm ²]	218

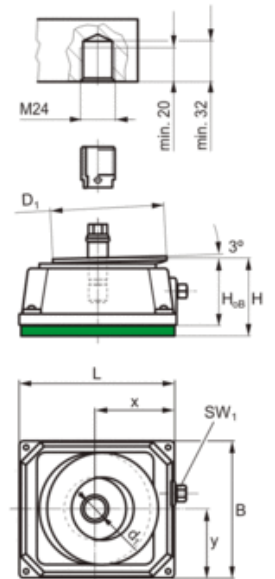Dimensioned sketch



Useful remarks	
Socket pin, dismountable.	

Product contents				
Name	Type	Art. no.	Quantity	
 Insert Wedgmounds QFixx	515.6-VRKCS /902	1.53515-6.59	1	
 Threaded sleeve	M24x28.9 SW 21	7.190.1028	1	

Remark extent of supply	
Supplied including plug-in bolt and thread socket for M24.	

Mounting sketch

