

# Technical datasheet

## Insert Wedgmounds QFixx 515.6-VRKCS /915

Art. no.  
**1.53515-6.65**

For closed machine foot design. A simple blind thread in the machine foot is necessary to create a strong and secure connection.


Max. load  
**12000 daN**

Article information	
Type	515.6-VRKCS /915
Name	Insert Wedgmounds QFixx
Art. no.	1.53515-6.65
Color	RAL 9005 jet black

### Type illustration



### System description

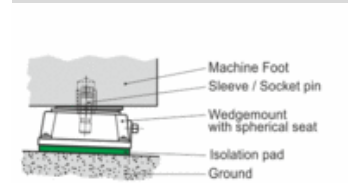

Technical Data		Dimensions	
Max. load [daN]	12000	Height H [mm]	84
Inclination [°]	3	Height H <sub>0B</sub> in neutral position, without pads [mm]	69
Leveling range [mm]	5	Length L [mm]	160
Leveling range [mm]	-5	x [mm]	80
Leveling distance per turn [mm]	0.37	y [mm]	70
Temperature range from [°C]	-20	Width B [mm]	140
Temperature range to [°C]	80	Diameter D <sub>1</sub> [mm]	113
Weight [kg]	7.15	Width across flats SW <sub>1</sub> [mm]	17



### Pad equipment

Bottom pad type	915
Pad thickness unloaded [mm]	15
Coefficient of friction on concrete with fine mortar	0.8
Hardness [° Shore A]	90 - 95
Bottom pad area A <sub>1</sub> [cm <sup>2</sup> ]	218

### Useful remarks

Socket pin, dismountable.


### Product contents

Name	Type	Art. no.	Quantity
 Insert Wedgmounds QFixx	515.6-VRKCS /915	1.53515-6.65	1
 Threaded sleeve	M24x28.9 SW 21	7.190.1028	1

### Remark extent of supply

Supplied including plug-in bolt and thread socket for M24.

### Dimensioned sketch

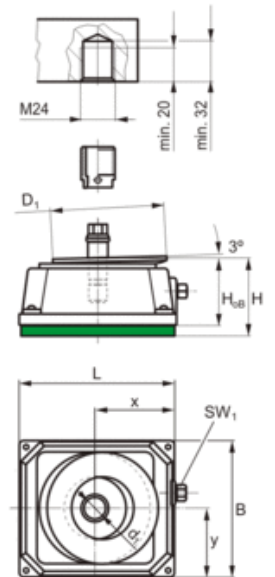

### Mounting sketch

