

Technical datasheet

Wedgmounts 2024.1-VRC /902

Art. no.
1.31124.59


For lathes, grinding machines, boring machines, transport lines and special machines. Ideal stability and non-skid properties. Without vibration isolation.

Max. load
40000 lbs

Article information	
Type	2024.1-VRC /902
Name	Wedgmounts
Art. no.	1.31124.59
Color	RAL 7016 anthracite grey
Other colors upon request.	
Surface treatment	Painted




System description




Technical Data		Dimensions	
Max. load [lbs]	40000	Height H [mm]	92
Leveling range [mm]	8	Height H_{0B} in neutral position, without pads [mm]	90
Leveling range [mm]	-7	Length L [mm]	250
Leveling distance per turn [mm]	0.18	Length L_1 [mm]	78
Temperature range from [°C]	-20	Length L_2 [mm]	65
Temperature range to [°C]	80	Length L_{max} [mm]	398
Weight [kg]	21.067	x [mm]	125
Pad equipment		y [mm]	80
Bottom pad type	902	Width B [mm]	160
Pad thickness unloaded [mm]	2	inner thread d_1	M16 / M20 / M24
Coefficient of friction on concrete with fine mortar	0.8	Width across flats SW_1 [mm]	27
Hardness [° Shore A]	90 - 95		
Bottom pad area A_1 [cm ²]	400		



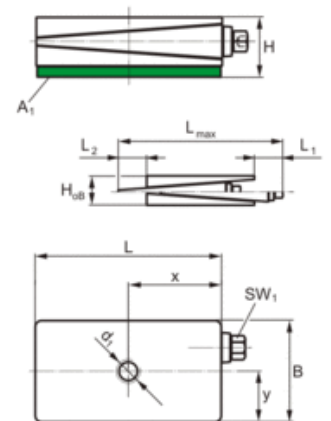

Dimensioned sketch



Mounting sketch



Suitable studs	
	Studs P more

Product contents					
Name	Type	Art. no.	Variante	Quantity	
 Wedgmounts	2024.1-VRC /902	1.31124.59		1	
 Threaded inserts (mounted)	M 16 / M30x2 li	9.93016.1	Variante: A	1	
 Threaded inserts (mounted)	M 20 / M30x2 li	9.93020	Variante: B	1	
 Threaded inserts (mounted)	M 24 / M30x2 li	9.93024	Variante: C	1	

Remark extent of supply	
Studs need to be ordered separately.	