

Technical datasheet

Wedgmounts 2012.1-VRC /902

Art. no.
1.31112.59

For lathes, grinding machines, boring machines, transport lines and special machines. Ideal stability and non-skid properties. Without vibration isolation.


Max. load
22000 lbs

Article information	
Type	2012.1-VRC /902
Name	Wedgmounts
Art. no.	1.31112.59
Color	RAL 7016 anthracite grey
Other colors upon request.	
Surface treatment	painted






Type illustration


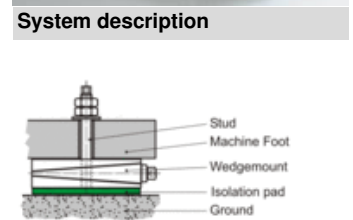
Technical Data		Dimensions	
Max. load [lbs]	22000	Height H [mm]	54
Leveling range [mm]	6	Height H _{0B} in neutral position, without pads [mm]	52
Leveling range [mm]	-6	Length L [mm]	200
Leveling distance per turn [mm]	0.16	Length L ₁ [mm]	73
Temperature range from [°C]	-20	Length L ₂ [mm]	55
Temperature range to [°C]	80	Length L _{max} [mm]	336
Weight [kg]	6.561	x [mm]	100
Pad equipment		y [mm]	60
Bottom pad type	902	Width B [mm]	120
Pad thickness unloaded [mm]	2	inner thread d ₁	M12 / M16
Coefficient of friction on concrete with fine mortar	0.8	Width across flats SW ₁ [mm]	19
Hardness [° Shore A]	90 - 95		
Bottom pad area A ₁ [cm ²]	240		




System description

Suitable studs	
	Studs P more

Product contents					
Name	Type	Art. no.	Variante	Quantity	
 Wedgmounts	2012.1-VRC /902	1.31112.59		1	
 Threaded inserts (mounted)	M 12 / M22x1.5 li	9.93012	Variante: A	1	
 Threaded inserts (mounted)	M 16 / M22x1.5 li	9.93016	Variante: B	1	

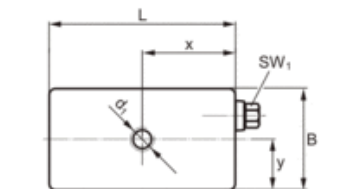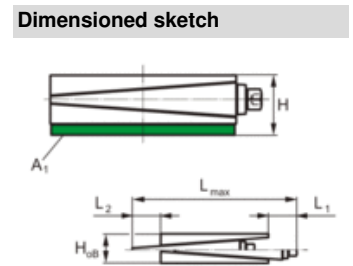

Mounting sketch

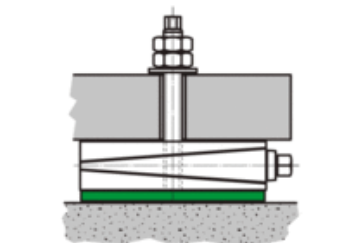

Remark extent of supply
Studs need to be ordered separately.