

Technical datasheet

Wedgmounts 7-VRC /NS

Art. no.
1.30007.73


For lathes, grinding machines, boring machines, transport lines and special machines. Ideal stability and non-skid properties. Without vibration isolation.

Max. load
10000 daN

Article information	
Type	7-VRC /NS
Name	Wedgmounts
Art. no.	1.30007.73
Color	RAL 7016 anthracite grey
Other colors upon request.	
Surface treatment	painted



Technical Data		Dimensions	
Max. load [daN]	10000	Height H [mm]	74
Leveling range [mm]	8	Height H _{0B} in neutral position, without pads [mm]	70
Leveling range [mm]	-10	Length L [mm]	175
Leveling distance per turn [mm]	0.3	Length L ₁ [mm]	79
Temperature range from [°C]	-20	Length L ₂ [mm]	36
Temperature range to [°C]	80	Length L _{max} [mm]	306
Weight [kg]	12.924	Width B [mm]	230

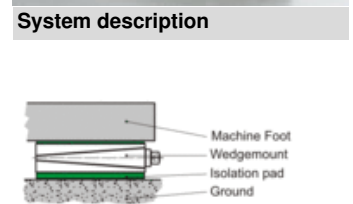

Pad equipment		Dimensions	
Bottom pad type	902	Width across flats SW ₁ [mm]	30
Pad thickness unloaded [mm]	2	Width across flats SW ₂ [mm]	17
Coefficient of friction on concrete with fine mortar	0.8		
Coefficient of friction tolerance +/-	0.1		
Hardness [° Shore A]	90 - 95		
Bottom pad area A ₁ [cm ²]	400		
Top pad type	902		
Pad thickness unloaded [mm]	2		
Coefficient of friction on concrete with fine mortar	0.8		
Hardness [° Shore A]	90 - 95		
Top pad area A ₂ [cm ²]	400		

