Technical datasheet

Wedgmounts
2024.2-VRC /716

Art. no.
1.32124.56

For tool, plastic, graphic and general production machines. Superior isolation and damping properties. Excellent non-skid properties.

Max. load
18000 lbs

Article information	
Type	2024.2-VRC /716
Name	Wedgmounts
Art. no.	1.32124.56
Color	RAL 7016 anthracite grey
Other colors upon request.	
Surface treatment	painted

Technical Data	
Max. load [lbs]	18000
Leveling range [mm]	8
Leveling range [mm]	-7
Leveling distance per turn [mm]	0.18
Temperature range from [°C]	-15
Temperature range to [°C]	100
Weight [kg]	21.6

Pad equipment	
Bottom pad type	716
Pad thickness unloaded [mm]	15
Coefficient of friction on concrete with fine mortar	0.85
Hardness [° Shore A]	70 - 75
Bottom pad area A_1 [cm^2]	400

Dimensions	
Height H [mm]	105
Height H_{oB} in neutral position, without pads [mm]	90
Length L [mm]	250
Length L_1 [mm]	78
Length L_2 [mm]	65
Length L_{max} [mm]	398
x [mm]	125
y [mm]	80
Width B [mm]	160
Inner diameter d_1 [mm]	27
Width across flats SW_1 [mm]	27

Suitable studs

Studs RGM more

Studs S more

Accessories

Disk springs more

Isolating washers more

Isolation tubes more

Remark extent of supply

Studs need to be ordered separately.

Type illustration

System description



Dimensioned sketch

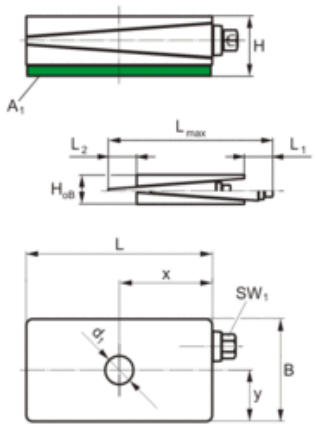

Mounting sketch



© 2026 AirLoc Corp.
Telephone: +1 508 528 0022 - Fax: +1 508 528 7555
42 Hayward Street, Franklin, MA 02038 USA
www.airloc.com
info@airloc.com