

Technical datasheet

Wedgmounts 10-VRC /NF

Art. no.
1.30010.61

For passive placement of sensitive devices and machine placement in multi storied buildings.
Best vibration isolation.

Max. load
9000 lbs

Article information	
Type	10-VRC /NF
Name	Wedgmounts
Art. no.	1.30010.61
Color	RAL 7016 anthracite grey
Other colors upon request.	
Surface treatment	painted




Technical Data		Dimensions	
Max. load [lbs]	9000	Height H [mm]	86
Leveling range [mm]	13	Height H_{0B} in neutral position, without pads [mm]	70
Leveling range [mm]	-7	Length L [mm]	370
Leveling distance per turn [mm]	0.49	Length L_1 [mm]	28
Temperature range from [°C]	-20	Length L_2 [mm]	28
Temperature range to [°C]	80	Length L_{max} [mm]	427
Weight [kg]	32.2	Width B [mm]	230
Pad equipment		Width across flats SW_1 [mm]	19
Bottom pad type	B1		
Pad thickness unloaded [mm]	13		
Coefficient of friction on concrete with fine mortar	0.9		
Coefficient of friction tolerance +/-	0.1		
Hardness [° Shore A]	40 - 45		
Bottom pad area A_1 [cm ²]	840		
Top pad type	903		
Pad thickness unloaded [mm]	3		
Coefficient of friction on concrete with fine mortar	0.8		
Hardness [° Shore A]	90 - 95		
Top pad area A_2 [cm ²]	840		

System description



Dimensioned sketch

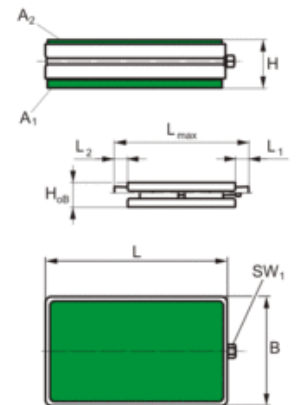

Mounting sketch

