Technical datasheet

Wedgmounts
4-VRC /NA

Art. no.
1.30004.56

For tool, plastic, graphic and general production machines. Superior isolation and damping properties. Excellent non-skid properties.

Max. load
18000 lbs

Article information	
Type	4-VRC /NA
Name	Wedgmounts
Art. no.	1.30004.56
Color	RAL 7016 anthracite grey
Other colors upon request.	
Surface treatment	painted

Technical Data	
Max. load [lbs]	18000
Leveling range [mm]	6
Leveling range [mm]	-6
Leveling distance per turn [mm]	0.2
Temperature range from [°C]	-15
Temperature range to [°C]	100
Weight [kg]	10.6

Pad equipment	
Bottom pad type	716
Pad thickness unloaded [mm]	15
Coefficient of friction on concrete with fine mortar	0.85
Coefficient of friction tolerance +/-	0.1
Hardness [° Shore A]	70 - 75
Bottom pad area A_1 [cm2]	392
Top pad type	706
Pad thickness unloaded [mm]	5
Coefficient of friction on concrete with fine mortar	0.85
Hardness [° Shore A]	70 - 75
Top pad area A_2 [cm2]	392

Dimensions	
Height H [mm]	66
Height H_{oB} in neutral position, without pads [mm]	46
Length L [mm]	200
Length L_1 [mm]	60
Length L_2 [mm]	42
Length L_{max} [mm]	301
Width B [mm]	200
Width across flats SW_1 [mm]	22
Width across flats SW_2 [mm]	12

Type illustration

System description



Dimensioned sketch

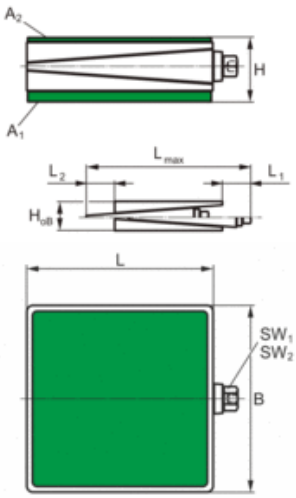

Mounting sketch



© 2026 AirLoc Corp.
Telephone: +1 508 528 0022 - Fax: +1 508 528 7555
42 Hayward Street, Franklin, MA 02038 USA
www.airloc.com
info@airloc.com